



J SERIES

JBEAM 230

Order code: SG JBEAM230

KIT order code: SG JBEAM230KIT

Light source

- Osram Sirius HRI 231 W
- Lamp lifespan: 2000 h
- Electronic ballast

Optic system

- Beam Angle: 2,5°
- Electronic focus
- Illuminance: 66.000 lux @ 15 mt

Color system

- Color wheel with 11 colors + white

Effects

- Linear dimmer 0 - 100 %
- Adjustable strobe effect
- Electronic strobo, pulse, random
- Fixed gobo wheel with 16 gobos and 6 steps "beam reducer"
- Gobo shacking effect
- Gobo scroll effect with adjustable speed
- 16 / 24 facet circular rotating prism with adjustable speed
- Color rainbow effect
- Selectable half color function

Control and programming

- 3 DMX configurations available: 13 / 15 / 17 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Reset function via DMX
- Built-in analyzer for easy fault finding

Structure and cabinet

- Black metal housing and high resistance plastic materials
- LCD color display
- Pan angle: 360° / 540° / 630°
- Tilt angle: 90° / 180° / 270°
- Mounting points: 2 pairs of 1 / 4-turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN / OUT connection
- USB port for wireless DMX receiver
- IP rating: IP 20
- Forced air cooling system with electronic control

Power supply



- Input Voltage: AC~100 - 240 V, 50/60 Hz
- Switching power supply unit
- Max power: 270 W @ 230 VAC
- Power IN/OUT connection with Seetronic Power Twist
- Power supply cable 1 mt included

Weight and dimensions

- Net weight: 12,5 kg
- Dimensions: 338 x 469 x 224 mm



ILLUMINANCE DIAGRAM

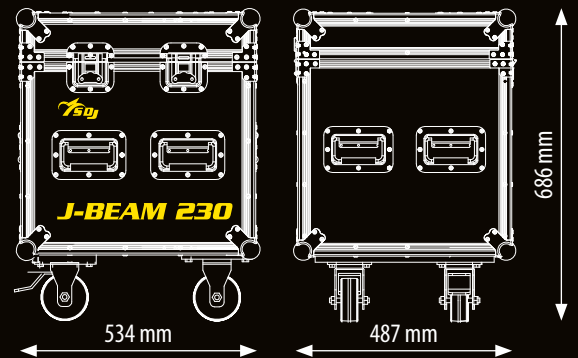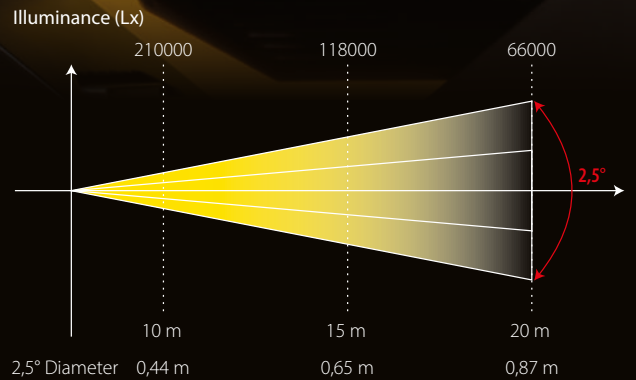

JWASH 400

Order code: SG JWASH400
KIT order code: SG JWASH400KIT

Light source

- 28 x 15 W led RGBW Full Color
- SMD RGB LEDs on the front ring
- LED lifespan: > 50.000 h
- LED refresh frequency: > 400 Hz flicker-free

Optic system

- Beam Angle: 17° / 32°
- Illuminance: 9224 lux @ 5 m (full ON - 17°)
1417 lux @ 5 m (full ON - 32°)

Color system

- LED source RGBW Full color
- Infinite chromatic possibilities

Effects

- Linear dimmer 0 - 100 %
- Motorized zoom
- Electronic strobo, pulse, random
- Control with 3 circular sectors
- Front LED ring with programmable static and dynamic effects
- CCT control

Control and programming

- 3 DMX configurations available: 26 / 31 / 43 channels
- Protocol USITT DMX 512
- Master/Slave mode
- Reset function via DMX
- Built-in analyzer for easy fault finding
- Virtual color wheel with 12 color
- White presets with 9 macros
- Virtual linear color wheel from 2.700 K to 8.000 K

Structure and cabinet



- Black metal Housing and plastic materials with high resistance
- LCD color display
- Pan angle: 360° / 540° / 630°
- Tilt angle: 90° / 180° / 270°
- Mounting points: 2 pairs of 1 / 4 turn locks
- Automatic repositioning of Pan and Tilt after accidental movements
- XLR 3-poles DMX IN/OUT connection
- USB port for wireless DMX receiver
- IP Rating: IP 20
- Forced air fan cooling system with electronic control

Power supply

- Input Voltage: AC~100 - 240 V 50 / 60 Hz
- Switching power supply unit
- Max power: 390 W @ 230 VAC
- Power IN/OUT connection with Seetronic Power Twist
- Power supply cable 1 mt included

Weight and dimensions

- Net weight: 11,5 kg
- Dimensions: 420 x 225 x 250 mm

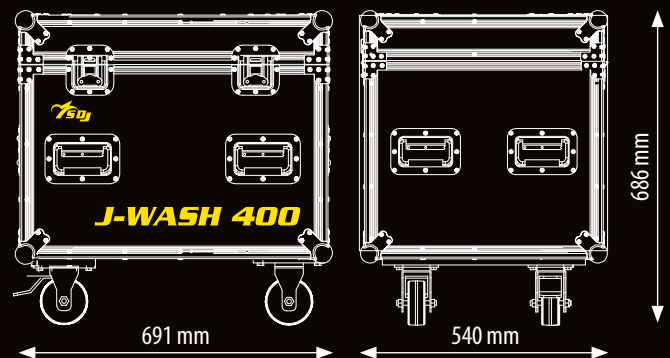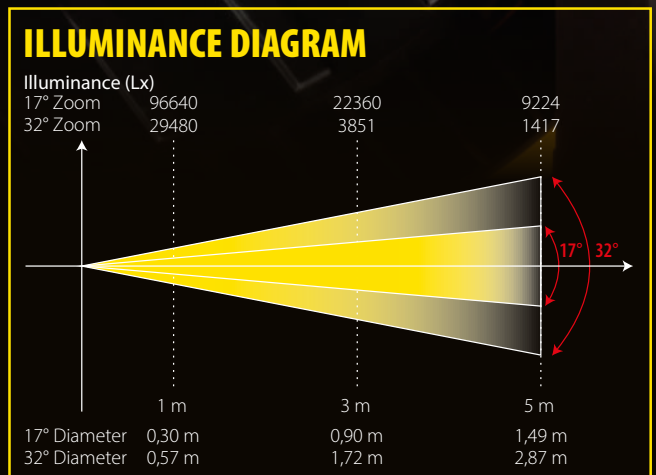

ENJOY YOUR LIGHTING



is a brand of **PROEL SPA**
(Worldwide Headquarters)
Via alla Ruenia, 37/43
64027 Sant'Omero (TE) - ITALY
Tel. +39 0861 81241
Fax +39 0861 887862
P.I. 00778590679
N.Reg.AEE IT 08020000002762

sdjlighting.com

SG JBROC23E